



PCT/IB 0 3 / 0 5 4 '1 3'

0 5. 01. 04



Rec'd PCT/770

INVESTOR IN PEOPLE

31 MAY 2005

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 15 JAN 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

He Behen

Dated

27 November 2003

BEST AVAILABLE COPY



1/77

27OCT03 EB47260-6 002624
P01/7700 0.00-0324903.4

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

6.70.1057 UK - Case 22

2. Patent application number

(The Patent Office will fill in this part)

0324903.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

INTERBREW S.A.
VARSTRAAT 94
B-3000 LEUVEN
BELGIUM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

A BELGIAN CORPORATION

7906530002

4. Title of the invention

KEG TAP ADAPTER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

G.F. REDFERN & CO.
LYNN HOUSE
IVY ARCH ROAD
WORTHING
WEST SUSSEX. BN14 8BX

Patents ADP number (if you know it)

1412002- 8435356001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description

12

Claim(s)

3

Abstract

1

Drawing(s)

5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 24 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs. S.M. Camp
01903 820466

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

- 1 -

KEG TAP ADAPTER

Field of the Invention

The present invention relates to an alcohol beverage dispensing apparatus and in particular, relates to a tap adapter for dispensing the alcohol beverage.

Background of the Invention

It is known to contain alcohol, such as wine in bags contained in a cardboard type container where the wine feeds by gravity through a shut off tap mounted outside the container. Further, it is known to fill a bag with beer in a keg. In the case of a beer keg, pressure is applied to the bag to dispense the beer from the bag and out of the keg. Further, the bag is inserted into the keg container prior to the beer being filled into the bag through a valve assembly.

However, there is a need for the user to be able to control the dispensing of the beer from the keg out through a tap connected to the valve assembly. In a home beverage dispensing system suitable for use in dispensing beer, the keg is a replaceable item and the tap is an item that forms part of the beer dispensing apparatus.

Typically, the dispensing apparatus comprises a tap that controls the flow of the beverage through a dispense tube. When the tap is closed, the beverage does not flow through the dispense tube. However there is usually a portion of the dispense tube that is located downstream of the tap closure. Upon tap closure, beer downstream of the tap does not readily flow out the dispense tube but instead slowly drips from the tube slowing the dispense process and possibly foaming the beverage. Accordingly, there is a need to address the problem associated with potential dripping of the beverage from the dispense tube after the tap is closed.

Summary of the Invention

It is desired to provide a tap adapter for use in an alcohol beverage dispensing apparatus that is not subject to dripping of alcohol beverage from the dispense apparatus after the tap is closed.

The present invention relates to a tap adapter for use in dispensing an alcohol beverage. The tap adapter comprises a dispensing tube through which beverage flows having a discharge end portion. The dispensing tube also has a relief valve located upstream of the discharge end portion. The tap adapter includes a tap positioned upstream of the relief valve. The tap is moveable between an open position and a closed position. In the open position, the tap permits the flow of the beverage through the dispense tube. In the closed position the tap inhibits the flow of beverage through the dispense tube and concurrently opens the relief valve. When the relief valve is open, air is able to pass in through the relief valve and into the dispense tube upstream of the discharge end portion so that the beverage in the discharge tube downstream of the relief valve flows freely out of the discharge end portion.

By providing a relief valve upstream of the discharge end portion and immediately downstream of the tap, beverage normally trapped downstream of the tap is now able to freely flow out of the discharge end portion due to the relief valve being open and permitting air to replace the beverage as it flows out of the discharge end portion of the tube.

The dispense tube may comprise a flexible tube having an elastic wall and may comprise of a suitable material such as, for example, silicone rubber or santoprene. Preferably, the relief valve comprises a slit cut into the elastic wall and the tap is located adjacent the slit to close this slit when tap is in the open position.

The tap has an actuating member that covers the slit when the tap is in an open position. The actuating member pivots during tap closure to pinch the elastic wall of the dispense tube upstream of the slit. As the walls of the dispense tube collapsed during pinching, the slit is forced open to permit air to enter into the dispense tube upstream of the dispense end portion and downstream of the pinched elastic wall. Preferably the tap pivots between its open and closed positions at a pivot point positioned immediately upstream of the relief valve.

In accordance with the preferred aspect of the present invention there is provided a tap adapter for use in dispensing an alcohol beverage from a keg containing the alcohol beverage. The keg has a neck and a valve assembly mounted to the neck of the keg. The valve assembly has a first valve through which beverage is dispensed from the keg. The tap adapter comprises a hollow arm adapted for releasably mounting in sealed relation with the valve assembly. The tap adapter has a flexible dispensing tube supported in the hollow arm through which the beverage flows. The dispensing tube has a first end portion connected with a first

valve for receiving the beverage. The dispensing tube has a second end portion from which the beverage is dispensed. The dispensing tube has a relief valve located between the first and second end portions. The tap adapter has a tap connected to the hollow arm and is movable between an open position and a closed position. The tap in the open position closes the relief valve and permits the beverage to flow through the dispense tube. The tap in the closed position engages the dispense tube upstream of the relief valve to pinch the dispense tube closed and thereby inhibits flow of beverage through the dispense tube. The tap also in the closed position opens the relief valve allowing air to pass into the dispense tube upstream of the second end portion whereby the beverage in the discharge tube downstream of the relief valve continues to freely flow out of the second end portion.

Brief Description of The Drawings

For a better understanding of the nature and objects of the present invention reference may be had to the accompanying diagrammatic drawings in which:

Figure 1 is a front elevation view of a home beer dispensing apparatus in accordance with the present invention;

Figure 2 is a side elevation view of the home beer dispensing apparatus;

Figure 3 is broken away perspective view of the keg showing the valve and spear assembly mounted within the keg;

Figure 4 is a sectional side view of the valve and spear assembly as shown in Figure 3;

Figure 5 is a plan view of the valve body of the valve assembly;

Figure 6 is a sectional side view of the tap adapter mounted to the keg inside the dispensing apparatus;

Figure 7 is a side sectional view of the tap adapter of Figure 6 showing the tap pivoted open; and,

Figures 8 and 9 are perspective views of the tap and flexible dispensing tube showing the tap respectively in open and closed positions.

Detailed Description Of The Invention

Referring to Figures 1 and 2 there is shown a home beer dispensing apparatus, appliance or unit 10. The dispensing apparatus 10 is primarily intended for use in domestic kitchens but may also be used in utility rooms, garages, domestic bars, caravans etc. While the preferred embodiment relates to dispensing beer, alternatively carbonated solutions or other alcohol beverages may be dispensed by apparatus 10.

The home beer dispensing apparatus 10 has a front wall 12 and a dispensing tap 14 protruding forward of the front wall 12. A drip tray 16 also protrudes forward of the front wall 12 and is adapted to support an open glass container 18 below the dispensing tap 14. The home beer dispensing apparatus 10 further has a base 21 adapted to rest on a counter top. The front wall 12 is an extension of two pivoting side walls 20 which may be moved between closed and open positions to allow the keg 22 (see Figure 2 in broken lines) to be inserted into the housing of the home beer dispensing apparatus 10.

The housing 17 of the home beer dispensing apparatus 10 further includes a top wall 24 and a rear wall 26. The rear wall 26 has a grill 30 that permits for air circulation within the home beer dispensing apparatus

10. An electrical cord 32 extends through the rear wall 26 of the apparatus 10 to provide a connection into a main electrical supply to supply electrical power to the electrical components housed within the unit 10. Alternatively, a 12 Volt DC supply input may be used.

The dispensing apparatus 10 has a cooling system 34 located behind and below keg 22 that is adapted to cool beer in keg 22 when keg 22 is placed into dispensing apparatus 10

Referring now to Figures 3 through 6, the valve assembly 40 and spear 102 are shown. The valve assembly 40 and spear 102 form part of the beverage dispensing assembly.

The valve assembly 40 is adapted to fit into a raised collar aperture 42 of keg 22. The valve assembly 40 has an annular shaped body 46 that is secured in the aperture 42. The valve body 46 has an annular groove 47 and flange 49 that is adapted to extend above the keg 22 for mating with a tap dispensing adapter 38 (Figure 6) connected to tap 14.

The valve body 46 has a first passageway 48, a second passageway 50, and a third passageway 52 spaced apart from each other and extending through the valve body 46. As best seen in Figure 6, the first passageway 48 is centrally disposed or located within the valve body 46 and the second and third passageways 50, and 52 are spaced radially of the first central passageway 48.

The valve assembly includes a first valve 54, a second valve 56 and a third valve 58. The first valve 54 is seated in the first passageway 48 for controlling the flow of the beverage or beer through the first passageway 48 into and out of the bag 44.

The second valve 56 is seated in the second passageway 50 for controlling the flow of gas such as carbon dioxide through the second

passageway 50 into and out of the bag.

The third valve 58 is seated in the third passageway 52 and controls the flow of gas through the third passageway 52 into and out of the keg 22 exterior to the bag 44.

Each valve, 54, 56, and 58 has a valve actuator or stem 60 that effectively opens and closes the valve. The valve stem 60 extends away from the valve body 46 by a different predetermined distance for each of valves 54, 56 and 58. Each of the valves 54, 56 and 58 further include a valve head 70 connected to the valve stem 68. The valve head 70 carries an O-ring 72 which is adapted to seal the valve head within the respective passageway. A spring 74 urges the valve head 70 into sealing engagement with its corresponding passageway. The valve stems 68 are accessible from outside the keg 22 for moving each valve head 70 into an open and closed position to respectively enable and inhibit fluid flow through passageways 48, 50 and 52.

The valve body 46 has an annular recessed groove 62 recessed in an inner wall 64 of the valve body 46. The inner wall 64 is positioned within the keg 22. The recessed grooves 62 is adapted for receiving the neck 66 of bag 44 in press fit relation therewith. The annular recessed groove 62 has a diameter that surrounds the first and second passageways 48 and 50. The third passageway 52 is located outside of the diameter of the recessed groove 62 and as a result, the third passageway 52 is located outside of the bag 44.

The keg 22 has a collar flange 82 which defines the raised collar aperture 42, the valve body 46 has an outer peripheral wall 63 with a recessed groove 61 extending around the outer wall 63. An intermediate ring or bung 80 is adapted to seat the valve body 46 within the raised

collar aperture 42. The intermediate ring 80 has inner and outer walls 84, 86. The inner wall 84 has flange 88 extending inwardly thereof that is adapted to fit into the recessed groove 61 of the outer wall 63 of the valve body 46. The outer wall 86 of the intermediate ring 80 has a resilient barb 90 and a locking flange 92 spaced from the barb 90 so as to define a outer locating groove 94 into which the collar flange 82 of the keg 22 is held. The barb 90 is adapted to pass through the aperture 42 and spring back into locking engagement with the collar flange 82 so as to lock the valve assembly 40 in place. Special tools are required to remove the valve assembly 40 and the intermediate ring 80 from the collar flange 82 of the keg 22 once the keg 22 is returned to the brewery for refilling.

In order to ensure that the contents of the keg 22 have not been tampered with, the keg 22 has an anti-tamper ring 96 that overlays the intermediate ring 80, a portion of the keg 22 and a portion of the valve body 46. The intermediate ring 80 has an aperture 98 that passes completely through the intermediate ring 80 to provide a vent passageway. The anti-tamper ring 96 has a flange part 100 that is inserted into the vent aperture 98 of the intermediate ring 80. In the event the anti-tamper ring 96 is removed from the keg 22, vent aperture 98 is open and the contents or any pressure within the keg 22 is released. Further, as a pressure relief feature, the anti-tamper ring 96 is designed to release from aperture 98 when pressure in keg 22 exceeds a predetermined valve to vent pressurized air through aperture 98.

Referring to Figures 6 and 7, the tap adapter 38 is mounted to the valve assembly 40 in fluid flow communication with the first valve 54. This attachment is a snap action sealed attachment on inner and outer walls of valve flange 49.

The dispenser adapter 38 has a hollow arm 120 that has a first end portion 122 adjacent the valve assembly 40 and a second end portion 24 which is remote therefrom. The first end portion 122 is connected to the first valve 54 so as to open the valve 54. This connection is made when the adapter is snap fitted downwardly onto the valve neck flange 49. The hollow arm 120 extends from the valve assembly 40 out through the housing 17 to a position where the remote end portion 124 of the hollow arm 120 is outside of the housing 17.

As better shown in Figure 7, the hollow arm 120 is separable by a hinge point 130. The arm 120 is separable into an upper arm portion 132 and a lower arm portion 134. As shown in Figure 7, lower arm portion 132 carries the tap 14 integral therewith. The lower arm portion 134 comprises a half hollowed out passageway 137 (see Figure 9). Inserted into this lower arm portion 134 is a tubular cartridge 126 that has a flexible dispense tube 128 that interconnects the tap 14 at first end portion 129 with the first valve 54 so that the beverage may flow through the tube 128 and out its downstream second or discharge end portion 136.

The cartridge 126 is in effect a frame like member which is adapted to be snap fitted into place with the lower arm portion 134. The cartridge 126 also carries the tube 128 therethrough for connection into the first end portion 122 of the hollow arm 120 so that when the cartridge is inserted into the hollow arm 120, and the hollow arm is subsequently mounted onto the valve assembly 40, first end portion 129 of the tube 128 sealingly engages passageway 48 and opens valve 54 so that beverage may be dispensed through valve 54 and into the tube 128. The upper arm portion 132 as shown in Figure 7 may then be snapped back into place relative to the lower arm portion 132. Alternatively, the upper arm

portion 132 and the lower arm portion 134 may be held in place once the doors 22 of the appliance are closed and posts 170 (Figure 6) are brought into engagement with both the upper and lower portions 132, 134 of the hollow tube 120 to thereby hold them together.

The adapter 38 is provided with a base portion 140 for supporting the hollow arm 120. The base portion 140 has a neck or supporting ring 142 that is adapted to surround and releasably engage the valve neck flange 49. The base portion 140 further includes an annular flange portion 144 which provides an inverse shape of a saucer that is adapted to abut the top surface of the keg 22 and to be supported thereon.

The base portion 140 has locking spring members (not shown) that engage the valve neck groove 47 and are movable to release the adapter 38 from the valve assembly 40.

Tap 14 is connected to the remote end 124 of the hollow arm 120 and in particular the lower arm portion 134. As best seen in Figures 8 and 9, the tap 14 is operable between a closed position (Figure 9) to shut off the flow of beverage through the tube 128 and an open position (Figure 8) permitting beverage to flow through the tube 128 and out discharge end portion 136. The tap 14 also forms an integral part of the hollow arm 120 and in particular the lower portion 134. The tap 14 has a handle 140 that is pivotally connected to a cam member 150 so as to rotate cam member 150 into pinching engagement against tube 128 as indicated at pinching point 152. The handle is normally biased in the closed position and may be drawn forward to release cam member 150 from the tube 128 and thereby open the tube at point 152 and permit beverage to be dispensed along the tube 128 contained within the hollow arm 120 from the valve assembly 40.

As shown in Figure 9, as the tap 14 is biased forward (to the right in Figure 9) with the cam member 150 pinches the elastic wall 180 of the flexible tube 128 together to thereby restrict flow of beverage through the tube 128. This is referred to throughout the specification and claims as the tap 14 being in the closed position. The flexible tube 128 may comprise a silicone rubber material or a santoprene material. The tube 128 is further provided with a relief valve 190. The relief valve 190 comprises a slit cut into the wall 180 of the tube 128. The slit 190 is cut parallel to the pinching direction of corner 151 of cam member 150. When the tap 14 is in the closed position, shutting off the flow of beverage through the dispense tube 128, the relief valve slit 190 is open.

The tap 14 is pivoted about point 182 immediately upstream of the relief valve 190 between its open and closed positions. As seen in Figure 8, the tap 14 is in the open position permitting flow of beverage through tube 128. Also, in this open position the surface 155 of cam member 150 of the tap 14 is adapted to cover or extend over the relief valve 190 to ensure that the relief valve 190 is closed. With tap 14 in its open position, opposing walls between the slit 190 in the tube 128 contact each other preventing beverage from escaping through the closed slit 190.

When the tap 14 is pivoted to its closed position shown in Figure 9, the deflection or pinching of the tube 128 at point 154 deflects the elastic wall 180 adjacent the slit 190. This effectively results in the slit 190 opening as illustrated by the bent tube showing the V-shaped notched section in relief valve 190 for the tube 128A. As a result, air as represented by arrows 192 is permitted to enter in through the slit of relief valve 190 and move downstream towards the discharge end 136. Consequently any beverage contained or located in the tube 128

- 12 -

downstream of the pinched closure 152 readily flows out from the discharge end 136 of the dispensing tube 128 when relief valve 190 is open and tube 128 is pinched closed.

WHAT IS CLAIMED IS:

1. A tap adapter for use in dispensing an alcohol beverage, the tap adapter comprising:

a dispensing tube through which the beverage flows having a discharge end portion, and the dispensing tube having a relief valve located upstream of the discharge end portion; and,

a tap positioned upstream of the relief valve, the tap being movable between an open position and a closed position, the tap in the open position permitting flow of the beverage through the dispense tube, and the tap in a closed position inhibiting flow of the beverage through the dispense tube and opening the relief valve allowing air to pass into the dispense tube upstream of the discharge end portion whereby the beverage in the discharge tube downstream of the relief valve freely flows out the discharge end portion.

2. The tap adapter of claim 1 wherein the tap is positioned adjacent the relief valve and closes the relief valve when the tap is in the open position.

3. The tap adapter of claim 1 wherein the dispense tube has an elastic wall and the relief valve comprises a slit extending through the elastic wall.

4. The tap adapter of claim 3 wherein the tap has an actuating member that covers the slit when the tap is in the open position and that pivots to pinch the elastic wall of the dispense tube upstream of the slit so as to close the dispense tube upstream of the slit and to open the slit of the elastic wall of the dispense tube to permit air to enter into the dispense tube upstream of the dispense end portion and downstream of the pinched elastic wall.

5. The tap adapter of claim 4 wherein the tap pivots between the open and closed positions at a pivot point positioned immediately upstream of the relief valve.

6. A tap adapter for use in dispensing an alcohol beverage from a keg containing the alcohol beverage, the keg having a neck and a valve assembly mounted to the neck of the keg, the valve assembly having a first valve through which beverage is dispensed from the keg, the tap adapter comprising:

a hollow arm adapted for releasably mounting in sealed relation with the valve assembly;

a flexible dispensing tube supported in the hollow arm through which the beverage flows, the dispensing tube having a first end portion connected with the first valve for receiving the beverage, the dispensing tube having a second end portion from which the beverage is dispensed, and the dispensing tube having a relief valve located between the first and second end portions; and,

a tap connected to the hollow arm and movable between an open position and a closed position, the tap in the open position permitting the beverage to flow through the dispense tube, and the tap in the closed position engaging the dispense tube upstream of the relief valve to pinch the dispense tube closed inhibiting flow of the beverage through the dispense tube and to open the relief valve allowing air to pass into the dispense tube upstream of the second end portion whereby the beverage in the discharge tube downstream of the relief valve continues to freely flow out the second end portion.

7. The tap adapter of claim 6 wherein the dispense tube has an elastic wall and the relief valve comprises a slit extending through the

elastic wall.

8. The tap adapter of claim 7 wherein the tap has an actuating member that covers the slit when the tap is in the open position and that pivots to pinch the elastic wall of the dispense tube upstream of the slit and to open the slit of the elastic wall of the dispense tube to permit air to enter into the dispense tube upstream of the dispense end portion and downstream of the pinched elastic wall.

9. The tap adapter of claim 8 wherein the tap pivots between the open and closed positions at a pivot point positioned immediately upstream of the relief valve.

10. The tap adapter of claim 6 wherein the valve assembly supports a bag within the keg filled with the beverage, the valve assembly including a second valve through which pressurized air is injected into the keg against an outside wall of the bag.

11. The tap adapter of claim 10 wherein:

the valve assembly has a valve neck portion that extends beyond the neck portion of the keg; and,

the adapter has a base portion for supporting the hollow arm, the base portion comprising a neck adapted to releasably engage the valve neck and an annular flange portion adapted to abut the keg.

12. The tap adapter of claim 6 wherein the tap forms an integral part of the hollow arm of the adapter.

KEG TAP ADAPTER

ABSTRACT

A tap adapter for dispensing an alcohol beverage has a flexible dispensing tube through which the beverage flows. The dispensing tube has a discharge end portion and has a relief valve located upstream from the discharge end portion. A tap is positioned adjacent to, and upstream of, the relief valve. The tap is moveable between an open position and a closed position. The tap in the open position permitting flow of the beverage through the discharge tube. The tap in the closed position inhibiting flow of the beverage through the discharge tube and opening the relief valve allowing air to pass into the discharge tube upstream of the discharge end portion whereby the beverage in the discharge tube downstream of the relief valve freely flows out of the discharge end portion.

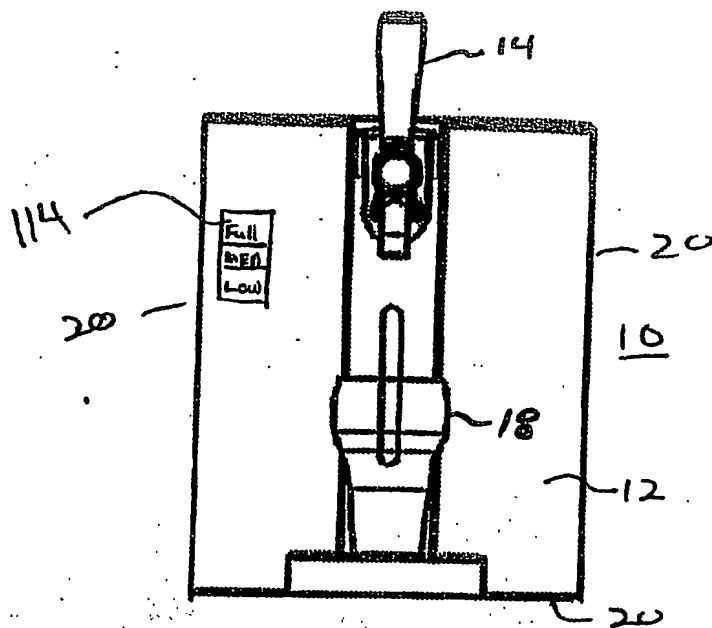


FIG. 1

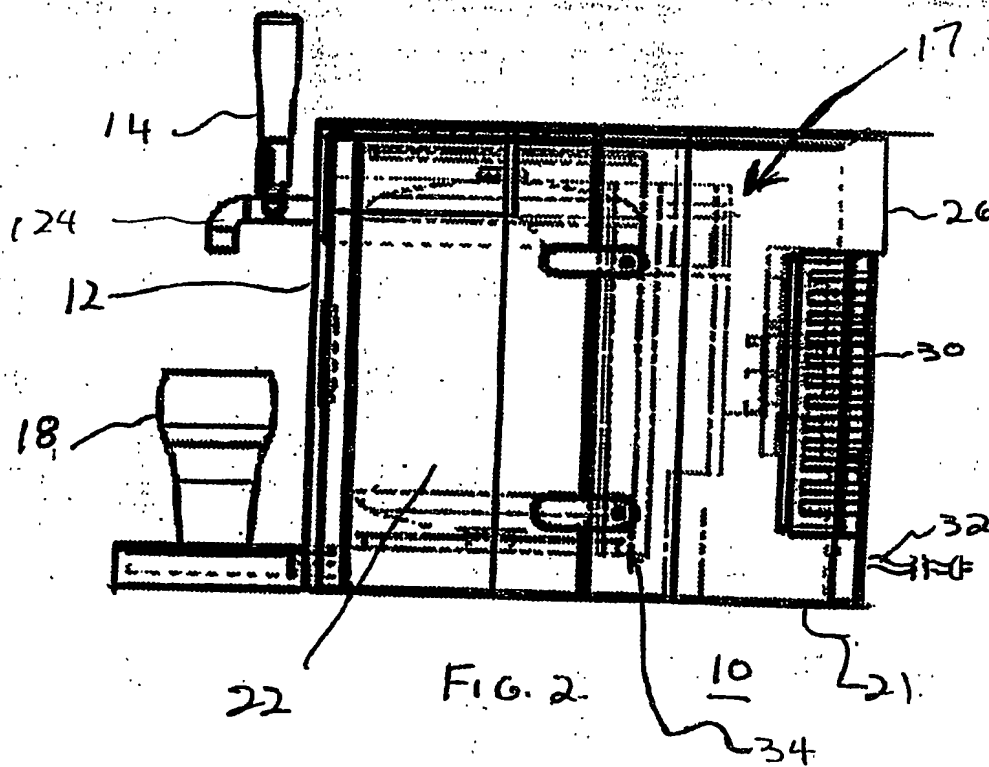


FIG. 2

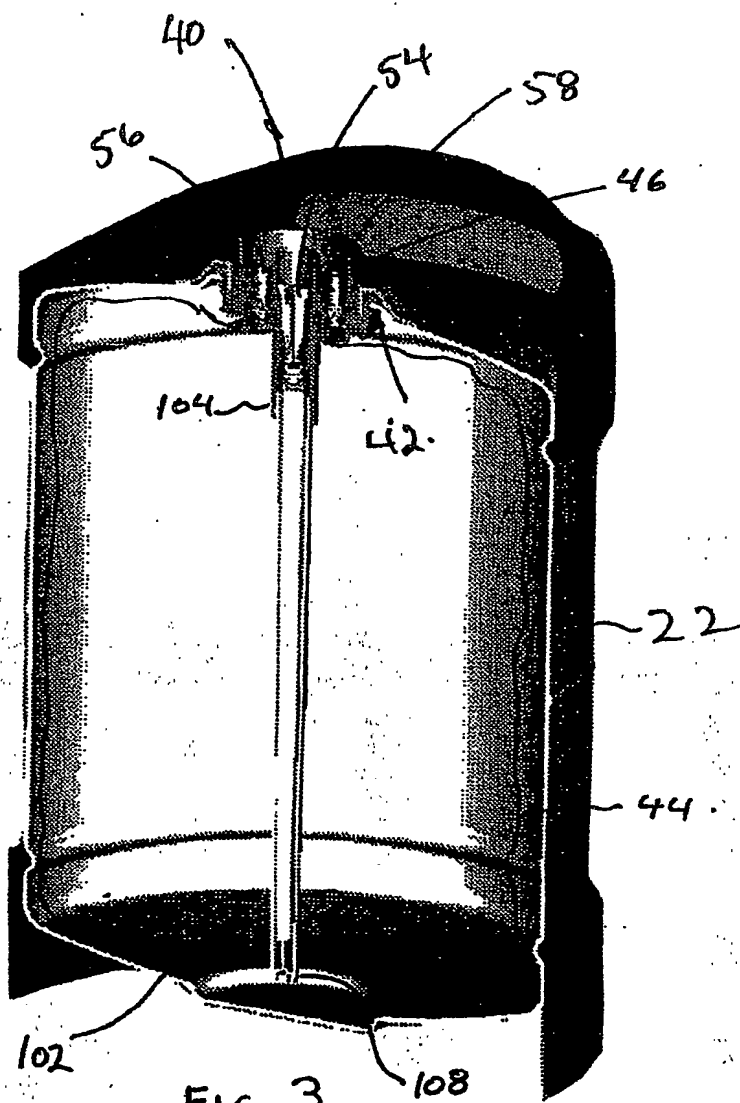
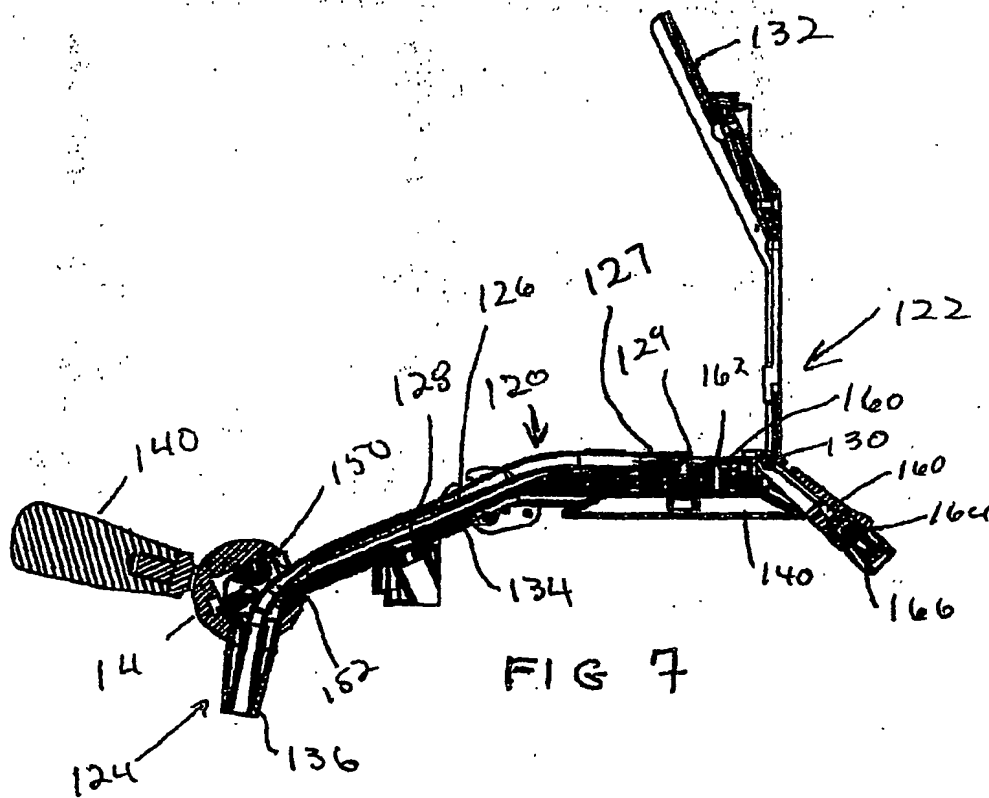
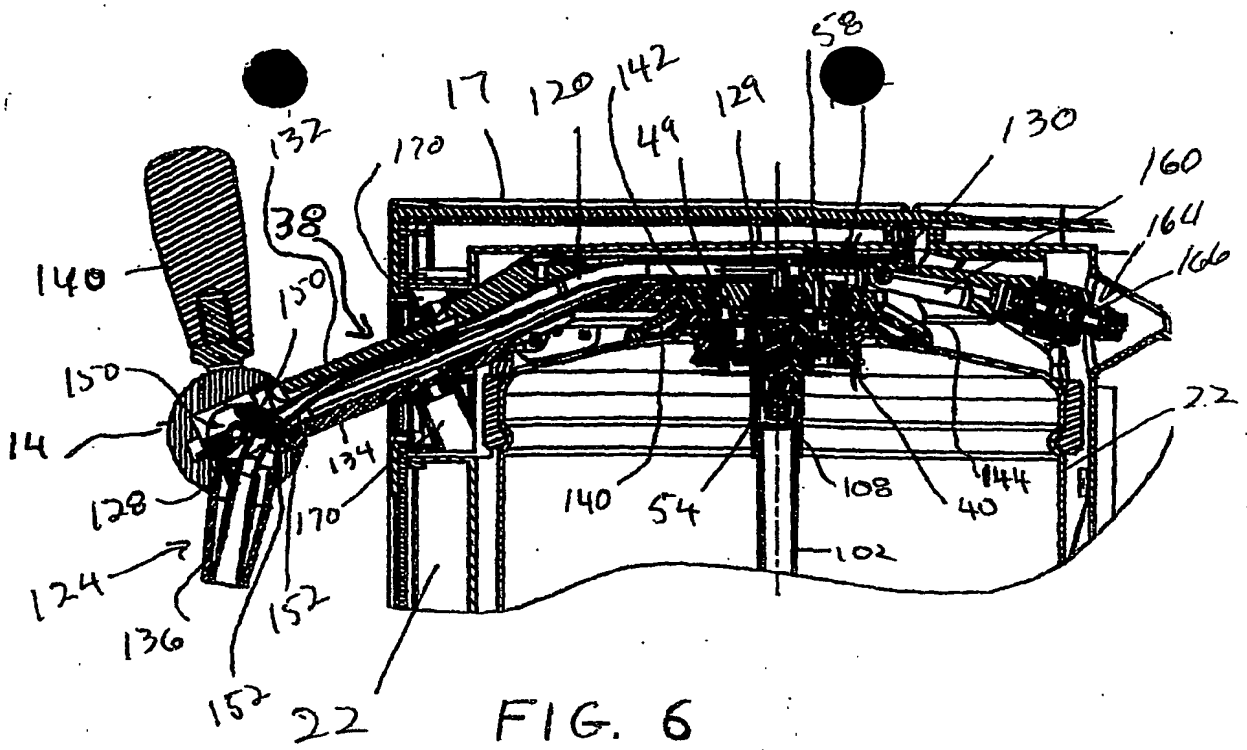


FIG 3



FIG. 4



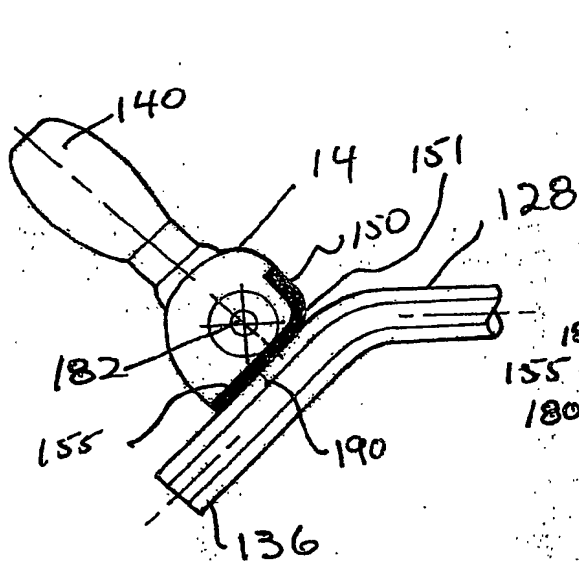


FIG. 8

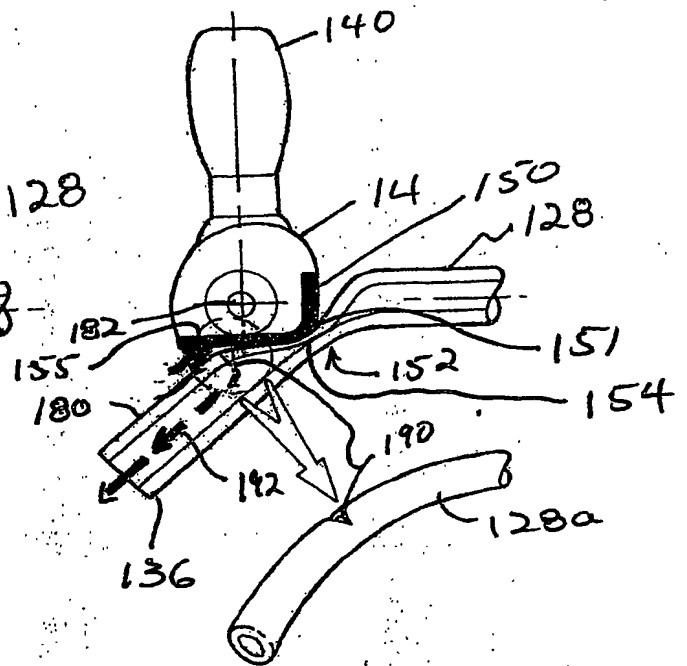


FIG. 9.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.